

CATALOGUE

LED LIGHTING | Q1-2024



TOWARDS A BRIGHTER FUTURE

V-TAC

Meaningful Innovation.



WELCOME TO V-TAC

V-TAC Lighting

V-TAC Digital

V-TAC Audio

V-TAC Solar

V-TAC Electrical

V-TAC Smart

V-TAC Energy

V-TAC was founded with the vision of providing energy-efficient LED lighting solutions worldwide.

While building a vast portfolio in LED lighting over the past years, we were also able to build expertise in innovation and expand our R&D team to offer a diversified catalogue with over 5000+ products to our clients and partners all over the UK and Europe.

Utilizing our brand value and manufacturing technologies, we have been expanding our product categories beyond lighting, with one mission to improve the lives of humanity worldwide.

Now, we are moving towards promoting sustainable practices that will help citizens and businesses lower their carbon footprint, and become a global leader in providing energy efficient systems — including solar panels, inverters, battery packs, and power stations.

Many divisions, one mission.



2009

V-TAC was founded with the vision of providing energy-efficient LED lighting solutions worldwide

2011

Began our EU expansion by opening the first V-TAC warehouse and office in Sofia, Bulgaria

2013

Started building our distribution network in the UK from our office in Southall, London.

2015

Launched our in-house product testing lab in Sofia, Bulgaria.

2016

Achieved \$100M Annual Turnover- Manufacturing Joint Venture with DASHER Lighting for decorative lighting.

2017

In-brand partnership with Samsung. Launched the V-TAC Pro series.

2023



2022

Progressed into the green energy era with our new Renewables range

2021

Centralized warehouse in Bulgaria extended to 42000+ sq mts.

2020

- New website launch
- Opened new office in Ireland.





















2019

Opened new office in Poland.

2018

- Partnership with Tuya and launched new Smart Series
- Unveiled the new V-TAC Showroom in Slough, UK

Table of content

	Linear Lights	04		Garden and Wall Lamps	37
	LED Batten Fittings	06		Motion Sensor	40
	Non Corrosive Battens	08		LED Tubes	45
	LED Mini Panels	10		LED Lamps	47
	LED Panels	13		LED Spotlights	51
	Fire Rated Downlights	17		Aluminium Profiles	53
	LED Bulkhead	20		LED Strip Light	57
	LED Highbay	24		LED Striplight Kitss	59
	Emergency Lights	26		Wireless Switches	60
	LED Floodlights	29			
	Solar Lights	35			

NEW ADDITIONS

NEW

Table of content

	Non-Corrosive CCT/Wattage Switchable Range (with Self Test Emergency)	08
	Surface Mounted Mini Panels Round & Square	11
	Mini Panels Dimmable Drivers	12
	CCT/Wattage Switchable Panels	14
	Spotlight Fiterated Fitting	18
	Canless Fittings	19
	Slim Line LED Bulkhead(Conduit Entries)	21
	Ceiling Lights with PIR sensor	23
	135 Lm/w Standard Floodlight Range from 30W to 300W	30
	Floodlight range with built in Photocell	31



SAMSUNG
LED
Illuminated

05 YEAR
WARRANTY

30,000 Hours
Aluminium
AC:200-240V, 50Hz
IP20

Linear Lights

V-TAC LED Linear Lights are an energy-efficient, low-maintenance alternative to traditional linear fluorescent in industrial, commercial, and light assembly applications. It is the optimal solution for conventional lighting systems and excellent for new installations due to its low installation cost.



UGR<19 Linear Lights



1.5m Wire Length
Upto 12 metres Linkable
IP20

SKU CCT	Watts	Lumens	Type	Size	Unit Colour	Box Qty
21384 - 4000K	40	3590	Suspended	1197x50x65mm	Silver	10


3-in-1 Linear Light



1.5m Wire Length
Upto 12 metres Linkable
IP20


SKU CCT	Watts	Lumens	Type	Size	Unit Colour	Box Qty
20060 - 3IN1	40	2500	Suspended	1197x50x65mm	Black	10

Slim Linear Lights

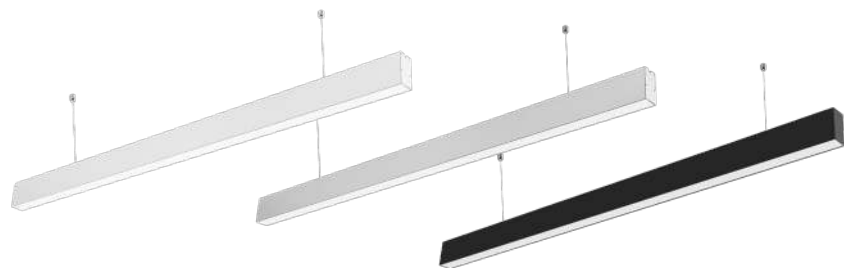

1.5m Wire Length
Upto 12 metres Linkable
IP20

SKU CCT	Watts	Lumens	Type	Size	Unit Colour	Box Qty
21882 - 3000K 21374 - 4000K	40	3270	Suspended	1194x35x67mm	Black	12
21375 - 4000K 21601 - 6400K	40	3300	Suspended	1194x35x67mm	Silver	12
21602 - 6400K	40	3270	Suspended	1194x35x67mm	White	12

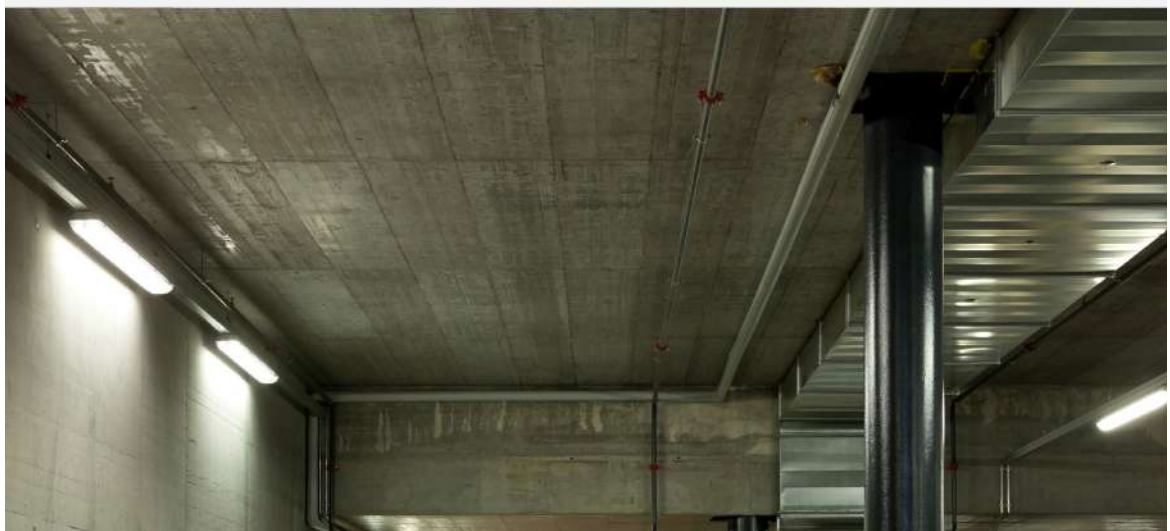

SAMSUNG
LED
Illuminated

LED Batten Fittings

V-TAC's extensive range of LED Batten Fittings boasts of premium quality LED chips provided by Samsung, a staggering lifespan of up to 30,000-hour, an unbreakable body with the most durable material, and a wide range of sizes for different applications.

05 YEAR
WARRANTY

The Essentials series of waterproof fittings, featuring an IP65-rated design, are constructed with a robust and hermetically sealed body, ensuring their resilience against water jets and dust. This critical attribute makes them indispensable for outdoor lighting applications.

50,000 Hours
AC:220-240V, 50Hz
IP20 and IP65



Professional T8 Style Integrated Fittings Single and Twin in one fitting



- Polycarbonate+Iron
- IP20
- 5 Year Warranty
- Flicker Free
- Hinged Cover for easy instalation

STD
Standard

MS
Microwave Sensor
CORRIDOR FUNCTION

EM
Emergency

MS+EM
Microwave Sensor + Emergency
CORRIDOR FUNCTION


SKU CCT	Watts	Lumens	Type	Size	Box Qty
7011 - 3IN1	20W/30W/40W	2800/4200/5400	STD	4 ft	6
7012 - 3IN1	20W/30W/40W	2800/4200/5400	MS	4 ft	6
7013 - 3IN1	20W/30W/40W	2800/4200/5400	EM	4 ft	6
7014 - 3IN1	20W/30W/40W	2800/4200/5400	MS+EM	4 ft	6
7015 - 3IN1	30W/40W/50W	4200/5600/6750	STD	5 ft	6
7016 - 3IN1	30W/40W/50W	4200/5600/6750	MS	5 ft	6
7017 - 3IN1	30W/40W/50W	4200/5600/6750	EM	5 ft	6
7018 - 3IN1	30W/40W/50W	4200/5600/6750	MS+EM	5 ft	6
7019 - 3IN1	40W-50W-60W	5800/7000/8100	STD	6 ft	6
7020 - 3IN1	40W-50W-60W	5800/7000/8100	MS	6 ft	6
7021 - 3IN1	40W-50W-60W	5800/7000/8100	EM	6 ft	6
7022 - 3IN1	40W-50W-60W	5800/7000/8100	MS+EM	6 ft	6




Remote Control for Batten with Sensor

SKU	Box Qty
7814	box

NEW Non-Corrosive CCT/Wattage Switchable
Single and Twin in one fitting



IP65
RATING


IK10
RATING


140
LUMEN/W

SAMSUNG
LED
Illuminated

3 Variable CCT
Variable Watts


SELF TEST



Polycarbonate

IP65

5 Year

STD
Standard

MS
Microwave Sensor
CORRIDOR FUNCTION

EM
Emergency

MS+EM
Microwave Sensor + Emergency
CORRIDOR FUNCTION

SKU CCT	Watts	Lumens	Type	Size	Box Qty
23071 - 31N1	20/25/30	4200	STD	4 ft	9
23072 - 31N1	20/25/30	4200	MS	4 ft	9
23073 - 31N1	20/25/30	4200	EM	4 ft	9
23074 - 31N1	20/25/30	4200	MS+EM	4 ft	9
23075 - 31N1	30/40/50	7000	STD	5 ft	9
23076 - 31N1	30/40/50	7000	MS	5 ft	9
23077 - 31N1	30/40/50	7000	EM	5 ft	9
23078 - 31N1	30/40/50	7000	MS+EM	5 ft	9
23079 - 31N1	40/50/60	8400	STD	6 ft	9
23080 - 31N1	40/50/60	8400	MS	6 ft	9
23081 - 31N1	40/50/60	8400	EM	6 ft	9
23082 - 31N1	40/50/60	8400	MS+EM	6 ft	9



Remote Control for Batten with Sensor

SKU	Box Qty
7814	box

Integrated sealed Fittings

Polycarbonate
 IP65
 2 Year Warranty
 Wire Through, terminal boxes at both ends



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
216283 - 4000K 216282 - 6500K	18	2160	2 ft	12
216285 - 4500K 216284 - 6400K	36	4320	4 ft	12
216287 - 4000K 216286 - 6500K	48	5760	5 ft	12

Super Slim Battens

Plastic
 IP20
 5 Year Warranty
 Flicker Free
 Quick Connector



SKU CCT	Watts	Lumens	Size	Box Qty
20344 - 3000K 20345 - 4000K	10	1000	1 ft	30
20347 - 3000K 20348 - 4000K 20349 - 6500K	20	2050	2 ft	30
20350 - 3000K 20351 - 4000K 20352 - 6500K	40	4300	4 ft	30
20354 - 4000K 20355 - 6500K	50	6000	5 ft	30
21670 - 4000K 21671 - 6500K	60	7200	6 ft	30



LED Panels

The PRO Series LED panels range are all made with top-quality PMMA diffusers which provides a uniformly distributed light and prevents the panels from turning yellow. It proves its durability with exteriors composed of an innovative combination of Aluminium+PMMA+PP, and its energy-saving upgrade through the improved driver box and Samsung LEDs. Both mini and big panels are inclusive of a quick connector for easy installation.



NEW

Backlit Surfaced Mini Panels Integrated Non Dimmable Driver Included

20,000 Hours

Plastic

AC:220-240V, 50/60Hz

IP20

2 Year



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
7870 - 3000K 7871 - 4000K 7872 - 6500K	6W	660	121.2x30.6mm	100
7873 - 3000K 7874 - 4000K 7875 - 6500K	12W	1200	167.4x30.7mm	60
7876 - 3000K 7877 - 4000K 7878 - 6500K	18W	1850	215.6x30.8mm	40
7879 - 3000K 7880 - 4000K 7881 - 6500K	24W	2500	288.6x31.2mm	20

NEW Backlit Surfaced Mini Panels Integrated Non Dimmable Driver Included

20,000 Hours

Plastic

AC:220-240V, 50/60Hz

IP20

2 Year



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
10492 - 3000K 10493 - 4000K 10494 - 6500K	6W	660	120.8x120.8x30.7mm	100
10495 - 3000K 10496 - 4000K 10497 - 6500K	12W	1200	167.3x167.3x30.7mm	60
10498 - 3000K 10499 - 4000K 10500 - 6500K	18W	1850	214x214x31mm	40
10514 - 3000K 23023 - 4000K 10516 - 6500K	24W	2500	287x287x30.7mm	20



Recessed CCT Switchable Mini Panels External Non Dimmable Driver Included

30,000 Hours Lifespan

Aluminium

AC:100-240V, 50Hz

IP20

2 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Cutting Size(mm)	Box Qty
23326 - 3IN1	3W	130	84x12mm	73mm	box
6982 - 3IN1	6W	490	120x12mm	110mm	40
6983 - 3IN1	9W	820	145x18mm	133mm	20
6984 - 3IN1	12W	1160	170x12mm	160mm	20
6985 - 3IN1	18W	1550	225x12mm	210mm	20
23327 - 3IN1	22W	2265	240x12mm	220mm	box
23328 - 3IN1	24W	2500	230x12mm	280mm	box



Input power: AC:230V,50/60Hz
 Battery Type: Life PO4 6.4V, 1.5Ah
 Charging time: 24 Hours
 Working time: 3 hours
 Max LED Current: 2A Power
 Consumption: 4VA
 Input Current:40mA
 Size: 245x32x67mm

Emergency Pack 6W to 24W

SKU	Box Qty
8275-1	20



NEW

DIMMABLE DRIVER FOR LED MINI PANELS



SKU	Dimmable Type	Watts	Box Qty
8073	Triac	6W	200
8074	Triac	9-12W	200
8075	Triac	18W	200
8076	Triac	22-24W	200



Back-Lit LED Panels



60 X 60 Panel

30,000 Hours Lifespan

Aluminium+TPA

DC:30-42V

IP20

5 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
6826-TPA - 4000K	36	4320	595x595mm	6
6827-TPA - 6000K				

60 X 60 Panel UGR < 19

30,000 Hours Lifespan

Aluminium+PS+PP

DC:30-42V

IP20

5 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
216777 - 4000K	40	4000	595x595x33mm	6
216778 - 6000K				

NEW CCT Changing Panels

30,000 Hours
 Aluminium+TPA
 AC:220-240V, 50Hz
 IP40
 5 Year



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
6972 - 3IN1	36	4320	595x595mm	6
6977 - 3IN1	45W	5400	1195x595mm	4

High Lumens Panel - CCT/Wattage Switchable

50,000 Hours
 Aluminium+TPA+PS
 AC:220-240V,50/60Hz
 IP40
 5 Year



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
23330-TPA - 3IN1	28W	28W - 3500	595x595x34mm	6
	32W	32W - 3840		
	36W	36W - 4320		
	40W	40W - 4800		

NEW CCT Borderline Panels

30,000 Hours
 Aluminium
 AC:220-240V, 50Hz
 IP20
 5 Year



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
10336 - 3IN1	48	4800	595x595mm	6



Edge-Lit LED Panels



High Lumen Panels 120x60

50,000 Hours Lifespan
Aluminium + PMMA + PP
AC:200-240V, 50/60Hz
IP20
5 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
21749 - 6500K	40	5400	1195x595x12.5mm	2

High Lumen Panels 120x30

20,000 Hours Lifespan
Aluminium + PMMA + PP
AC:200-240V,50/60Hz
IP20
2 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
216257 - 4500K	29	3960	1195x295x12.5mm	1
216258 - 6000K				

SURFACE FRAME FOR BACKLIT PANEL
60*120, HEIGHT 6.3CM



SKU	Box Qty
10231	box

SURFACE FRAME FOR BACKLIT PANEL
60*60, HEIGHT 6.3CM




SKU	Box Qty
10230	box

Aluminum Frame 120X30 With Screws
Fixed



SKU	Box Qty
8158	10

Suspended Mounting For Panels



Adjustable height from 0.3 to 1m. This product can be used for all sizes of panels, that is
300 x 300 600 x 600
1200 x 300 1200 x 600

SKU	Box Qty
6018	50

Big Panels Emergency Pack -UK



SKU	Watts	Box Qty
60303-1	45W	20

Dimmable Driver For Panels



SKU	Dimmable Type	Watts	Box Qty
11410	Triac	40W	50
6437	0-10V	45W	50



Fire Rated Downlights

Fire rated downlights are lighting fixtures designed to prevent the spread of fire between different levels or compartments of a building. They are typically installed in ceilings and are commonly found in domestic and commercial buildings, such as houses, hotels, hospitals, and offices.



Fire Rated Integrated 4-IN-1




- Dimmable
- Insulations Coverable
- Aluminium+Iron
- AC:200-240V,50Hz
- IP65
- Flicker Free
- Quick Connector
- 3 Year Warranty

SKU CCT	Watts	Lumens	Size(mm)	Cutting Size(mm)	Box Qty
7614 - 4IN1 WHITE BEZEL INCLUDED	5W/8W	5W 2700K-460lm 3000K-500lm 4000K-520lm 6400K-540lm 8W 2700K-720lm 3000K-720lm 4000K-800lm 6400K-840lm	90x38mm	65mm	48

SKU	Bezel Image	Unit Colour	Box Qty
11357		Black (Optional)	20
11358		Satin Nickel (Optional)	20
11359		Chrome (Optional)	20

NEW Spotlight Fiererated Fitting

Iron Body
AC:220-240V, 50Hz
IP65
Recessed
5 Years Warranty



SKU CCT	Unit Colour	Watts	Lumens	Size(mm)	Cutting Size(mm)	Box Qty
218173 - 3000K 218174 - 4000K 218179 - 6400K	Nickle	5W	500	81.5x57mm	57mm	60
218175 - 3000K 218176 - 4000K 218180 - 6400K	Chrome	5W	500	81.5x57mm	57mm	60
218177 - 3000K 218178 - 4000K 218181 - 6400K	White	5W	500	81.5x57mm	57mm	60

Push and Lock Can for Fire Rated-GU10 Holder



SKU	Bezel Finish	Bezel IP Rating	Installation Type	Size(mm)	Cutting Size(mm)	Box Qty
11281	Black	IP20	Recessed	90x120mm	80mm	60

Push and Lock Bezels



SKU	Unit Colour	IP Rating	Size(mm)	Box Qty
11277	White	IP20	90mm	10
11279	Satin Nickel	IP20	90mm	10
11280	Chrome	IP20	90mm	10
11282	White	IP65	90mm	10
11284	Satin Nickel	IP65	90mm	10
11285	Chrome	IP65	90mm	10

NEW Canless Fittings Can is IP20 rating



SKU	Bezel Finish	Bezel IP Rating	Installation Type	Size(mm)	Cutting Size(mm)
76781	White	IP20	Fixed	91x70mm	75mm
76791	Satin Nickel	IP20	Fixed	91x70mm	75mm
76801	Chrome	IP20	Fixed	91x70mm	75mm
76811	Black	IP20	Fixed	91x70mm	75mm
76831	Satin Nickel	IP65	Fixed	91x70mm	75mm
76841	Chrome	IP65	Fixed	91x70mm	75mm

Canless Fittings Can is IP20 rating



SKU	Bezel Finish	Bezel IP Rating	Installation Type	Size(mm)	Cutting Size(mm)	Box Qty
7681	Black	IP20	Fixed	85x90.3mm	68mm	20
7023	Brushed Brass	IP20	Fixed	85x90.3mm	68mm	20
7024	Polished Brass	IP20	Fixed	85x90.3mm	68mm	20
7682	White	IP65	Fixed	85x90.3mm	68mm	20
7683	Satin Nickel	IP65	Fixed	85x90.3mm	68mm	20
7685	Black	IP65	Fixed	85x90.3mm	68mm	20
7025	Brushed Brass	IP65	Fixed	85x90.3mm	68mm	20
7026	Polished Brass	IP65	Fixed	85x90.3mm	68mm	20
7027	White	IP20	Tilt	87x100mm	78mm	20
7791	Black	IP20	Tilt	87x100mm	78mm	20
7792	Chrome	IP20	Tilt	87x100mm	78mm	20
7793	Satin Nickel	IP20	Tilt	87x100mm	78mm	20
11367	Insulation Cover for Canless Fittings					10



LED Bulkhead

STD
Standard

MS
Microwave Sensor
CORRIDOR FUNCTION

EM
Emergency

MS+EM
Microwave Sensor + Emergency
CORRIDOR FUNCTION

LED Bulkhead

30,000 Hours Lifespan

Polycarbonate

AC:200-240V, 50/60Hz

IP65

5 Year Warranty



Chrome Bezel

SKU

11241



SAMSUNG
LED

Illuminated

SKU CCT	Watts	Lumens	Type	Size(mm)	Box Qty
21815 - 4000K	8	750	STD	270x90mm	10
818 - 4000K	8	720	MS	270x90mm	10
21816 - 4000K	10	720	EM	270x90mm	10
21817 - 4000K	10	720	MS+EM	270x90mm	10
2120016 - 3IN1	15	1400	STD	320x100mm	10
21801 - 4000K 21802 - 6400K	15	1625	STD	320x100mm	10
21804 - 4000K 21805 - 6400K	15	1580	MS	320x100mm	10
21806 - 4000K	17	1400	EM	320x100mm	10
21812 - 4000K	17	1400	MS+EM	320x100mm	10

NEW Slim Line LED Bulkhead

30,000 Hours
 Polycarbonate
 AC:220-240V, 50Hz
 IP65
 5 Year



8W LUMENS	16W LUMENS	20W LUMENS
3000K - 1050	3000K - 2100	3000K - 2550
4000K - 1100	4000K - 2250	4000K - 2600
6500K - 1100	6500K - 2300	6500K - 2500



SKU CCT	Watts	Lumens	Type	Size(mm)	Box Qty
801-24 - 3IN1	8W/16W/20W	2600	STD	260x90mm	10
804-24 - 3IN1	8W/16W/20W	2600	MS	260x90mm	10
806-24 - 3IN1	8W/16W/20W	2600	EM	260x90mm	10
812-24 - 3IN1	8W/16W/20W	2600	MS+EM	260x90mm	10



Slim Line LED Bulkhead

- 30,000 Hours Lifespan

- Polycarbonate

- AC:220-240V, 50Hz

- IP65

- 5 Year Warranty



8W LUMENS	16W LUMENS	20W LUMENS
3000K - 800	3000K - 1550	3000K - 1800
4000K - 875	4000K - 1700	4000K - 2100
6500K - 875	6500K - 1700	6500K - 2100



SKU CCT	Watts	Lumens	Type	Size(mm)	Box Qty
6851 - 3IN1	8W/16W/20W	2100	STD	315x75mm	10
6852 - 3IN1	8W/16W/20W	2100	MS	315x75mm	10
6853 - 3IN1	8W/16W/20W	2100	EM	315x75mm	10
6854 - 3IN1	8W/16W/20W	2100	MS+EM	315x75mm	10

Optional Rims



SKU	Name	Unit Colour
11225	Eyelid Half Cover For Vt-14	Black
11230	Chrome Rim For 14w Dome Light	Chrome

Slim Line LED Bulkhead - Large Base with 3-in-1 CCT


30,000 Hours Lifespan

Polycarbonate

AC:200-240V, 50/60Hz

IP65

5 Year Warranty



SKU CCT	Watts	Lumens	Type	Size(mm)	Box Qty
20093 - 3IN1	20	1850	STD	380x78mm	10
2120094 - 3IN1	20	1850	MS	380x78mm	10
2120095 - 3IN1	20	1850	EM	380x78mm	10
2120096 - 3IN1	20	1850	MS+EM	380x78mm	10

Chrome Rim For 20w Dome Light



SKU	Name
11231	Chrome Rim For 20w Dome Light

NEW LED Bulkhead-Sensor

25,000 Hours Lifespan

Plastic Clad Aluminium

AC:220-240V, 50/60Hz

IP65

3 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
21808 - 4000K 21809 - 6400K	12	900	290x60mm	10



**SAMSUNG
LED**
Illuminated

05 YEAR
WARRANTY

LED Highbay & Linear Lowbays

LED highbays and lowbays are types of lighting fixtures commonly used in commercial and industrial settings. LED highbays are typically used in facilities with high ceilings, such as warehouses, distribution centres, gymnasiums, and factories. They are designed to provide bright, high-intensity lighting over a large area, and are typically mounted at a height of 20 feet or higher. LED highbays offer energy savings and longer lifespan compared to traditional highbay lighting options such as metal halide or high-pressure sodium lamps. LED lowbays are designed for use in spaces with lower ceilings, such as garages, storage rooms, and workshops.



PRO Linear Lowbays

30,000 Hours Lifespan

Aluminium

AC:220-240V, 50/60Hz

IP54

5 Year Warranty



SKU CCT	Watts	Lumens	Beam Angle	Size(mm)	Box Qty
21892 - 6500K	100	9800	110°	537x130x96mm	9
21895 - 4000K 21896 - 6500K	200	19500	110°	1059x130x96mm	6

PRO Highbay with LIFUD Driver

25,000 Hours Lifespan

Aluminium

AC:175-265V, 50/60Hz

IP65

5 Year Warranty



SKU CCT	Watts	Lumens	Beam Angle	Size(mm)	Box Qty
20480 - 4000K 20481 - 6500K	100W	14000	360°	233x156mm	1
20482 - 4000K 20483 - 6500K	150W	21000	360°	278x156mm	1
20484 - 4000K 20485 - 6500K	200W	28000	360°	305x156mm	1



Emergency Lights

LED exit emergency lights are lighting fixtures used to indicate the location of emergency exits and provide illumination during power outages or other emergency situations. They are typically found in commercial and public buildings, such as offices, schools, and hospitals.



Emergency LED Bulkhead



Ni-Cd 3.6V, 1200mAh Battery

3 Hours Working Time

24 Hours Charging Time

Polycarbonate Cover

AC:220-240V, 50/60Hz

2 Year Warranty

- AC:220-240V,50/60Hz
- Wall Mounted
- Ni-cd 3.6V, 1200mAh
- Maintained & Non Maintained
- Includes 4 Way Legends



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
8437 - 6400K	3	140	346x107x60mm	10

LED Exit Light 4-IN-1 with Self Test

Ni-cd AA, 3.6V, 0.6Ah Battery

>3 Hours Working Time

12 Hours Charging Time

Polycarbonate+PMMA

AC:200-240V,50/60Hz

3 Year Warranty

- 4-in-1 : Ceiling | Hanging | Sidewall | Wall Mounting
- AC:220-240V,50/60Hz
- Ni-cd AA, 3.6V, 0.6Ah Battery
- Mode Of Operation Maintained
- 30 metres Viewing Distance From Both Sides
- Includes 4 Way Legends



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
7675 - 6000K	2.5	100	350x29x195mm	10
11362	Remote Control For Exit Light		100x41x15mm	10

Emergency Exit Box with Self Test

LiFePo4 3.2V 1500mAh Battery

3 Hours Working Time

Charging Time

Polycarbonate

AC:220-240V

4 Year (Battery 2 Year) Warranty

- IP20
- IK03
- Class II
- Beam Angle: 55°
- Self Test
- Up arrow legend included



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
7817 - 6000K	4	80	330x30x186mm	10

Legend For Exit Box, Arrow DOWN



SKU	Box Qty
7818	10

Legend For Exit Box, Arrow LEFT



SKU	Box Qty
7819	10

Legend For Exit Box, Arrow RIGHT



SKU	Box Qty
7820	10

Emergency LED Twin Spotlight

Ni-Cd 9.6V, 2200mAh Battery

>3 Hours Working Time

24 Hours Charging Time

Polycarbonate

AC:220-240V, 50/60Hz

2 Year Warranty

- Wall mounted
- Adjustable heads
- Fitted with high efficiency LED Chips
- High-performance Ni-Cd batteries .
- Green Light Indicator
- Reliable Emergency backup of 3 hours.
- Non maintained operation
- IP65 Protection perfect for outdoor use



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
80981 - 6000K	6	300	296x75x272mm	5

Emergency LED Downlight

Ni-Cd 3.6V, 1800mAh Battery

>3 Hours Working Time

5-6 Hours Charging Time

Polycarbonate + Aluminium

AC:220-240V, 50/60Hz

2 Year Warranty

- White and chrome bezel included
- Ceiling Recessed
- Over Charge And Discharge Protection
- AC:155V
- Non Maintained



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
8274 - 5500K	3	140	38.5x22x25mm	40



**SAMSUNG
LED**
Illuminated

05 YEAR
WARRANTY

LED Floodlights

V-TAC's LED floodlights are manufactured with industry-leading components to deliver exceptional performance, making them the perfect choice for efficient outdoor lighting. Each unit is designed and constructed of die-cast aluminum for maximum durability. With the IP65 rating, all the floodlights in this series are also water- and dust-proof.



NEW Low Wattage LED Floodlights

Die-Cast Aluminium
 AC:220-240V, 50Hz
 IP65
 5 Year



SKU CCT	Watts	Lumens	Wire Length	Body Colour	Size(mm)	Box Qty
10011 - 3000K 10012 - 4000K 10013 - 6500K	10	735	30cm	White	104x21x92mm	40
9898 - 3000K 9899 - 4000K 10010 - 6500K	10	735	30cm	Black	104x21x92mm	40
10017 - 3000K 10018 - 4000K 10019 - 6500K	20	1620	30cm	White	126.5x28x114mm	20
10014 - 3000K 10015 - 4000K 10016 - 6500K	20	1620	30cm	Black	126.5x28x114mm	20



NEW Super Efficient Flood Lights

Aluminium

AC:220-240V, 50Hz

IP65

5 Year



SKU CCT	Watts	Lumens	Wire Length	Body Colour	Size(mm)	Box Qty
23196 - 3000K 23197 - 4000K 23198 - 6500K	30	3450	1m	Black	164.5x34x153mm	box
23199 - 3000K 23216 - 4000K 23217 - 6500K	50	5740	1m	Black	183.5x34x169mm	box
23200 - 3000K 23218 - 4000K 23219 - 6500K	100	11480	1m	Black	242.5x40x253.5mm	box
23201 - 4000K 23202 - 6500K	150	17220	1m	Black	328.5x43x295mm	box
23220 - 4000K 23221 - 6500K	200	22960	1m	Black	402.5x44x349.5mm	box
10367 - 4000K 23203 - 6500K	300	34440	1m	Black	496x49x445mm	box

NEW LED Photocell Floodlight

Diecast Aluminium

AC:220-240V, 50Hz

IP65

5 Year Warranty

Dusk till Dawn



SKU CCT	Watts	Lumens	Wire Length	Body Colour	Size(mm)	Box Qty
23186 - 4000K 23187 - 6500K	30	3450	1m	Black	165x46x204.5mm	box
23188 - 4000K 23189 - 6500K	50	5740	1m	Black	197.5x46x241.5mm	box
23190 - 4000K 23191 - 6500K	100	11480	1m	Black	247.5x49.5x299mm	box
23192 - 4000K 23193 - 6500K	150	17220	1m	Black	318.5x55x390mm	box
23194 - 4000K 23195 - 6500K	200	22960	1m	Black	371x57x458.5mm	box

LED Floodlights with built in PIR Sensor-White
Angled Mounting Bracket for Easy Installation



- Manual Override
- Diecast Aluminium
- AC:220-240V, 50Hz
- IP65
- 5 Year Warranty
- Available with built in terminal box
- Available with pre-wired 1m flex

SKU CCT	Watts	Lumens	Type	Size(mm)	Box Qty
20268 - 3000K 20269 - 4000K 20270 - 6500K	10	735	Junction Box	133x60x113mm	20
20271 - 3000K 20272 - 4000K 20273 - 6500K	20	1510	Junction Box	157x60x128mm	20
20274 - 3000K 20275 - 4000K 20276 - 6500K	30	2340	Junction Box	177x60x143mm	10
20277 - 3000K 20278 - 4000K 20279 - 6500K	50	4000	Junction Box	195x60x178mm	10
20292 - 3000K 20293 - 4000K 20294 - 6500K	10	735	1m Flex	133x60x113mm	20
20295 - 3000K 20296 - 4000K 20297 - 6500K	20	1510	1m Flex	157x60x128mm	20
20298 - 3000K 20299 - 4000K 20300 - 6500K	30	2340	1m Flex	177x60x143mm	10
20301 - 3000K 20302 - 4000K 20303 - 6500K	50	4000	1m Flex	195x60x178mm	10



LED Floodlights with built in PIR Sensor-Black
Angled Mounting Bracket for Easy Installation

Manual Override

Diecast Aluminium

AC:220-240V, 50Hz

IP65

5 Year Warranty

Available with built in terminal box

Available with pre-wired 1m flex



SKU CCT	Watts	Lumens	Type	Size(mm)	Box Qty
20256 - 3000K 20257 - 4000K 20258 - 6500K	10	735	Junction Box	133x60x113mm	20
20259 - 3000K 20260 - 4000K 20261 - 6500K	20	1510	Junction Box	157x60x128mm	20
20262 - 3000K 20263 - 4000K 20264 - 6500K	30	2340	Junction Box	177x60x143mm	10
20265 - 3000K 20266 - 4000K 20267 - 6500K	50	4000	Junction Box	195x60x178mm	10
20280 - 3000K 20281 - 4000K 20282 - 6500K	10	735	1m Flex	133x60x113mm	20
20283 - 3000K 20284 - 4000K 20285 - 6500K	20	1510	1m Flex	157x60x128mm	20
20286 - 3000K 20287 - 4000K 20288 - 6500K	30	2340	1m Flex	177x60x143mm	10
20289 - 3000K 20290 - 4000K 20291 - 6500K	50	4000	1m Flex	195x60x178mm	10



RGB Floodlight

Aluminium
AC:200-240V
IP65
2 Year Warranty



SKU CCT	Watts	Size(mm)	Box Qty
5995 - RGB	30	185x163x26mm	20
5996 - RGB	50	245x192x28mm	10

ECO LED Work Lights

Diecast Aluminium
AC:100-265V,50Hz
IP65
5 Year Warranty



SKU CCT	Watts	Lumens	Wire Length	Size(mm)	Box Qty
2120122 - 6500K	100	9400	1.5m	247.5x65x305mm	4



TRIPOD STAND FOR FLOOD LIGHT

SKU	Colour	Box Qty
9104	Yellow	8
9546	Black	8



VT-868 BLACK WATERPROOF TERMINAL BLOCK -CABLE DIAMetre(5-9mm),IP68

SKU	Box Qty
5977	50



VT-881 BLACK 3 PIN TERMINAL BLOCK IP66

SKU	Box Qty
5987	50



Solar Lights

Solar technology offers a sustainable option for outdoor lighting with zero electricity costs. With plug and play installation, it is a simple and affordable way to light up the outside of your home or garden.



Remote Control Solar Floodlights

- 12 Hours _____
- 4-6 Hours _____
- IP65 _____
- 2 Year _____



SKU CCT	Watts	Lumens	Battery	Size(mm)	Box Qty
7822 - 4000K 7821 - 6400K	6W Solar panel	400	3.2V, 5000mAh Battery	190x55x170mm	10
7824 - 4000K 7823 - 6400K	10W Solar panel	800	3.2V, 6000mAh Battery	190x55x170mm	10
7826 - 4000K 7825 - 6400K	15W Solar panel	1200	3.2V, 12000mAh Battery	235x55x180mm	6
7828 - 4000K 7827 - 6400K	20W Solar panel	1800	3.2V, 16000mAh Battery	290x55x235mm	5
7830 - 4000K 7829 - 6400K	30W Solar panel	2600	3.2V, 20000mAh Battery	365x55x260mm	4

Solar Wall Lights

- 3.7V Lithium Battery 1200mAh
- Maximum 24 Hours
- 6-7 Hours Sunlight Charging
- IP65
- 2 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
8276 - 4000K	1.5	220	144.5x96x79mm	20

Solar Wall Lights

- 3.7V Lithium Battery 1200mAh
- Maximum 24 Hours
- 6-7 Hours Sunlight Charging
- IP65
- 2 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
8277 - 4000K	1.5	220	144.5x96x79mm	20

Solar Wall Lights

- 3.7V Lithium Battery 4000mAh
- Maximum 24 Hours
- 6-7 Hours Sunlight Charging
- IP65
- 2 Year Warranty




SKU CCT	Watts	Lumens	Size(mm)	Box Qty
8278 - 4000K	7	800	270x221x109.2mm	8

Solar Wall Lights

- 3.7V Lithium Battery 4000mAh
- Maximum 24 Hours
- 6-7 Hours Sunlight Charging
- IP65
- 2 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
8279 - 4000K	7	800	270x221x109.2mm	8

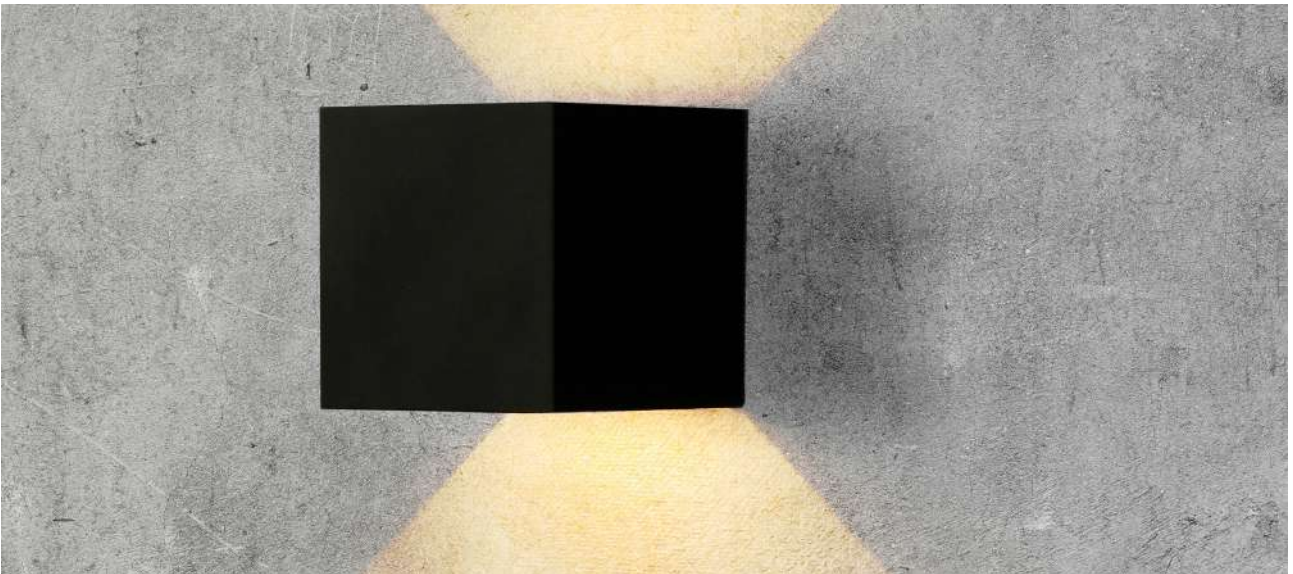

Garden & Wall Lights

Introducing our modern LED wall light range, the perfect replacement for traditional wall lights. A classy combination of energy efficiency and contemporary design to add style and elegance to your home or garden.



LED Up-Down Wall Lights

20,000 Hours Lifespan

Aluminium

AC:220-240V, 50Hz

IP65

2 Year Warranty

Adjustable beam angle



SKU CCT	Watts	Lumens	Size	Unit Colour	Box Qty
217078 - 3000K 217087 - 4000K	5	700	100x100x100mm	Black	20
217079 - 3000K 217088 - 4000K	5	700	100x100x100mm	White	20
218529 - 3000K 218530 - 4000K	11	1360	100x100x100mm	Black	20
218527 - 3000K 218528 - 4000K	11	1360	100x100x100mm	White	20

LED Rotatable Wall Lights with PIR Sensor

20,000 Hours Lifespan
Aluminium
AC:220-240V, 50/60Hz
IP65
2 Year Warranty



SKU CCT	Watts	Lumens	Size	Unit Colour	Box Qty
2940 - 3000K 2941 - 4000K	17	2520	212x165x100mm	Black	12
2938 - 3000K 2939 - 4000K	17	2520	212x165x100mm	White	12

E27 Wall Lamps



SKU	IP Rating	Unit Colour	Box Qty
8517	IP44	Matt Black	10

GU10 Wall Fittings



SKU	IP Rating	Unit Colour	Box Qty
7501	IP44	Stainless Steel	24

GU10 Wall Fittings



SKU	IP Rating	Unit Colour	Box Qty
7502-PIR	IP44	Stainless Steel	24

GU10 Up Down Fittings



SKU	IP Rating	Unit Colour	Box Qty
7500	IP44	Stainless Steel	16

GU10 Up Down Fittings



SKU	IP Rating	Unit Colour	Box Qty
7503-PIR	IP44	Stainless Steel	12

GU10 Up Down Fittings



SKU	IP Rating	Unit Colour	Box Qty
7569	IP44	Matt Black	16

GU10 Up Down Fittings



SKU	IP Rating	Unit Colour	Box Qty
7570	IP44	Matt White	16

GU10 Up Down Fittings



SKU	IP Rating	Unit Colour	Box Qty
7543	IP44	White	12

E27 Wall Fittings



SKU	IP Rating	Unit Colour	Box Qty
93574	IP44	Black-Square	10

GU10 Garden Spikes Fittings



SKU	IP Rating	Unit Colour	Box Qty
7518	IP44	Silver	8

GU10 Up Down Fittings



SKU	IP Rating	Unit Colour	Box Qty
7512	IP44	Black	12

E27 Wall Fittings



SKU	IP Rating	Unit Colour	Box Qty
93573	IP44	Black-Round	10

GU10 Up Down Fittings



SKU	IP Rating	Unit Colour	Box Qty
5157	IP44	Stainless Steel	12



Motion Sensor

Many areas, such as driveways, lobbies, parking garages and staircases remain unused for long hours but do need lighting to be lit automatically in case of movement. A motion sensor is a device that detects movements, and in some cases, light conditions and then transmits a signal for illumination.



SKU	Unit Colour	Box Qty
6608	White	50
6609	Black	50

Infrared Sensors Recessed

Sensor Type	Infrared
IP Rating	IP20
Detection Range	360°
Detection Distance	Max. 8m(<24°C)
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 400W LED
Size(mm)	50x62mm
Cutting Size(mm)	40mm
Time Delay	Min. 10sec±3sec, Max. 15min±2min
Body Type	Polycarbonate



SKU	Unit Colour	Box Qty
5087	Black	50
5086	White	50

Infrared Sensors Surfaced

Sensor Type	Infrared
IP Rating	IP20
Detection Range	360°
Detection Distance	Max 8m(<24°C)
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 1000W LED
Size(mm)	115x25mm
Time Delay	Min 10sec±3sec, Max 15min±2min
Body Type	Polycarbonate



SKU	Unit Colour	Box Qty
1356	White	50

Infrared Sensors-Manual Override Recessed

Sensor Type	Infrared
IP Rating	IP20
Detection Range	360°
Detection Distance	Max 6m(<24°C)
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 300W LED
Size(mm)	76x75.6mm
Cutting Size(mm)	61.5mm
Time Delay	Min 10sec±3sec, Max 15min±2min
Body Type	Polycarbonate



SKU	Unit Colour	Box Qty
5082	White	50

Infrared Sensors

Sensor Type	Infrared
IP Rating	IP65
Detection Range	120°/360°
Detection Distance	3/6m(<24°C)
Detection Motion Speed	0.6-1.5m/s
Ambient Light	10LUX/2000LUX(choice)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 400W LED
Size(mm)	36.8x25.5x55.4mm
Time Delay	5sec, 30sec, 1min, 3min, 5min, 8min(choice)
Body Type	Plastic



SKU	Unit Colour	Box Qty
5091	White	50

Infrared Sensors Recessed

Sensor Type	Infrared
IP Rating	IP20
Detection Range	360°
Detection Distance	Max 8m(<24°C)
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 400W LED
Size(mm)	98x73x82mm
Cutting Size(mm)	62.2mm
Time Delay	Min 10sec±3sec, Max 15min±2min
Body Type	Polycarbonate



SKU	Unit Colour	Box Qty
1355	White	50

Infrared Sensors-Manual Override Surfaced

Sensor Type	Infrared
IP Rating	IP20
Detection Range	360°
Detection Distance	Max 12m(<24°C)
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 300W LED
Size(mm)	88x55mm
Time Delay	Min 10sec±3sec, Max 15min±2min
Body Type	Polycarbonate



SKU	Unit Colour	Box Qty
6607	Black	100

Infrared Sensors Surfaced

Sensor Type	Infrared
IP Rating	IP20
Detection Range	360°
Detection Distance	Max. 8m(<24°C)
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:110-240V, 50/60Hz
Rated Load	Max 200W LED
Size(mm)	76x20.2mm
Time Delay	Min. 10sec±3sec, Max. 7min±2min
Body Type	Polycarbonate



SKU	Unit Colour	Box Qty
5078	White	50

Microwave Sensors

Sensor Type	Microwave
IP Rating	IP20
Detection Range	180°/360°
Detection Distance	1-8m(radius) adjustable
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 300W LED
Size(mm)	37x25x61.5mm
Time Delay	Min 10sec±3sec, Max 12min±1min
Body Type	Plastic



SKU	Unit Colour	Box Qty
5083	White	50

Microwave Sensors

Sensor Type	Microwave
IP Rating	IP20
Detection Range	360°
Detection Distance	5m-15m(adjustable)
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 300W LED
Size(mm)	80x80x32mm
Time Delay	10 sec to 12 min (adjustable)
Body Type	Plastic



SKU	Unit Colour	Box Qty
1446	White	50

Microwave Sensors-Manual Override

Sensor Type	Microwave
IP Rating	IP20
Detection Range	360°
Detection Distance	1-8m(radius) Adjustable
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<3-2000LUX(adjustable)
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 300W LED
Size(mm)	
Time Delay	Min 10sec±3sec, Max 12min±1min
Body Type	



SKU	Unit Colour	Box Qty
5571	White	50

Microwave Sensors Surfaced

Sensor Type	Microwave
IP Rating	IP65
Detection Range	180°/360°
Detection Distance	5m/10m
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<25-2000LUX
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 200W
Size(mm)	115x35x25mm
Time Delay	Min 10sec±3sec, Max 15min±2min
Body Type	Plastic



SKU	Unit Colour	Box Qty
5572	Black	50

Microwave Sensors Surfaced

Sensor Type	Microwave
IP Rating	IP65
Detection Range	180°/360°
Detection Distance	5m/10m
Detection Motion Speed	0.6-1.5m/s
Ambient Light	<25-2000LUX
Voltage	AC:220-240V, 50/60Hz
Rated Load	Max 200W LED
Size(mm)	115x35x25mm
Time Delay	Min 10sec±3sec, Max 15min±2min
Body Type	Plastic



SKU	Unit Colour	Box Qty
5081	White	50

Photocell Sensors

Sensor Type	Photocell
IP Rating	IP44
Detection Range	360°
Detection Distance	
Detection Motion Speed	
Ambient Light	<5-15LUX(adjustable)
Voltage	AC:220-240V, 50Hz
Rated Load	
Size(mm)	35.5x46x44.1mm
Time Delay	5 sec to 8 min (adjustable)
Body Type	Plastic



LED Tubes

V-TAC's extensive range of LED Tubes boast premium-quality LEDs provided by Samsung, a staggering lifespan of up to 25,000 hours, an unbreakable body built with the most durable material, and a wide range of sizes for different applications.



G13-T8 -Nano Plastic Tube

25,000 Hours Lifespan

Nano Plastic

AC:220-240V, 50Hz

IP20

5 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
21650 - 3000K 21651 - 4000K 21652 - 6500K	9	850	600x28mm	25
21654 - 4000K 21655 - 6500K	18	1850	1200x28mm	25
21656 - 3000K 21657 - 4000K 21658 - 6500K	20	2100	1500x28mm	25

High Lumen Nano Plastic Tube

25,000 Hours Lifespan

Nano Plastic

AC:220-240V, 50Hz

IP20

5 Year Warranty



SKU CCT	Watts	Lumens	Size(mm)	Box Qty
21672 - 4000K 21673 - 6500K	16.5	1850	1200x28mm	25
21674 - 4000K 21675 - 6500K	24	3000	1500x28mm	25

Single Fitting

Iron

AC:200-240V, 50/60Hz

IP20

2 Year Warranty



SKU	Size(mm)	Box Qty
6052	615x45x50mm	20
6054	1225x45x50mm	20
6056	1520x45x50mm	20

Twin Fitting

Iron

AC:200-240V, 50/60Hz

IP20

2 Year Warranty



SKU	Size(mm)	Box Qty
6053	615x55x50mm	20
6055	1225x55x50mm	12
6057	1520x55x50mm	12



LED Bulbs

Find the right bulb in V-TAC's newly improved range of LED bulbs. Our recent in-branding program enabled us to equip all PRO Series lamps with LEDs provided by Samsung. From aesthetically pleasing filament bulbs to our extensive options of 360° omnidirectional thermoplastic bulbs in all sizes, wattages, and lumens, we have a complete range of options to replace traditional lamps and achieve energy-saving lighting in your home, office, or business.



Reflector Bulbs PRO1

30,000 Hours Lifespan

Thermoplastic

AC:220-240V, 50Hz

IP20

5 Year Warranty



SKU CCT	Watts	Lumens	Type	Base	Dimmable	Box Qty
21210 - 3000K 21212 - 6500K	2.9	250	R39	E14	No	20
21138 - 3000K 21139 - 4000K 21140 - 6500K	4.8	470	R50	E14	No	20
21141 - 3000K 21142 - 4000K 21143 - 6500K	8.5	806	R63	E27	No	20
21135 - 3000K 21136 - 4000K 21137 - 6400K	11	1055	R80	E27	No	10

LED GLS Lamps

- 20,000 Hours Lifespan

- Thermoplastic

- AC:220-240V, 50Hz

- IP20

- 2 Year Warranty



SKU CCT	Watts	Lumens	Type	Base	Dimmable	Box Qty
217260 - 3000K 217261 - 4000K 217262 - 6500K	8.5	806	A60	E27	No	20
21852 - 3000K	8.5	806	A60	B22	Yes	12
21101 - 3000K 21850 - 4000K 21851 - 6500K	8.5	806	A60	B22	No	12
21102 - 3000K 20472 - 4000K 21853 - 6500K	10.5	1055	A60	B22	No	12
21854 - 3000K 21943 - 4000K 21855 - 6500K	15	1521	A65	B22	No	12
159 - 3000K 160 - 4000K 161 - 6400K	15	1250	A65	E27	No	10
162 - 3000K 163 - 4000K 164 - 6400K	17	1521	A65	E27	No	10

LED Candle Lamps

20,000 Hours Lifespan

Thermoplastic

AC:220-240V, 50Hz

IP20

5 Year Warranty



SKU CCT	Watts	Lumens	Type	Base	Dimmable	Box Qty
21171 - 3000K 21172 - 4000K 21173 - 6500K	4.5	470	Candle	E14	No	20
21860 - 3000K	4.5	470	Candle	B15	No	12
21103 - 3000K 2120152 - 6500K	4.5	470	Candle	B22	No	12
2143421 - 3000K 2143431 - 4000K 2143441 - 6500K	4.5	470	Candle	E27	No	20
2120045 - 3000K 2120186 - 4000K 2120187 - 6500K	5.5	470	Candle	E14	Yes	10
21861 - 3000K	5.5	470	Candle	B15	Yes	12
111 - 3000K 113 - 6400K	7	600	Candle	E14	No	10

LED Golf Lamps


20,000 Hours Lifespan

Thermoplastic

AC:220-240V, 50Hz

IP20

5 Year Warranty



SKU CCT	Watts	Lumens	Type	Base	Dimmable	Box Qty
21168 - 3000K 21169 - 4000K 21170 - 6500K	4.5	470	P45	E14	No	20
21104 - 3000K	4.5	470	G45	B22	No	12
21174 - 3000K 21175 - 4000K 21176 - 6500K	4.5	470	G45	E27	No	10
857 - 3000K	5.5	470	G45	E27	No	12
21863 - 3000K 21864 - 4000K 21865 - 6500K	6.5	600	P45	E14	No	25
21866 - 3000K 21867 - 4000K 21868 - 6500K	6.5	600	G45	E27	No	10

Clear Filament Bulbs

- 20,000 Hours Lifespan

- Glass

- AC:220-240V, 50Hz

- IP20

- 2 Year Warranty



SKU CCT	Watts	Lumens	Type	Base	Dimmable	Box Qty
2870 - 3000K	4	400	Candle	E14	Yes	20
214301 - 3000K	4	400	Candle	E14	No	10
212815 - 3000K	8	720	A60	E27	Yes	20

Clear Filament High-Lumens Bulbs

- 20,000 Hours Lifespan

- Glass

- AC:220-240V, 50Hz

- IP20

- 2 Year Warranty



SKU CCT	Watts	Lumens	Type	Base	Dimmable	Box Qty
212848 - 3000K 212849 - 4000K 212850 - 6500K	6	800	Candle	E14	No	20
2854 - 2700K 2855 - 4000K 2856 - 6400K	6	800	P45	E14	No	20
2851 - 2700K 2852 - 4000K 2853 - 6400K	6	800	G45	E27	No	20



SAMSUNG LED
Illuminated

05 YEAR WARRANTY

LED Spotlights

Our new range of LED spotlights with Samsung LEDs are the leading choice for efficient directional lighting solutions. This new range is perfectly compatible with existing GU10 holders. They deliver the same warm light as halogen spots while exhibiting the energy-saving benefits that LEDs provide. Ideal for retail and residential lighting.



LED Capsules Spotlights

20,000 Hours Lifespan

Plastic Clad Aluminium

12V AC/DC

IP20

5 Year Warranty



SKU CCT	Watts	Lumens	Beam Angle	Base	Dimmable	Box Qty
21131 - 3000K 21132 - 4000K 133 - 6400K	3.2	385	300°	G4	No	60
21246 - 3000K 21247 - 4000K 21248 - 6500K	3	330	300°	G9	No	60
217429 - 3000K 217430 - 4000K 217431 - 6500K	4.5	500	300°	G9	Yes	60

LED Spotlights-GU5.3

- 20,000 Hours Lifespan

- Plastic

- DC:12V

- IP20

- 5 Year Warranty



SKU CCT	Watts	Lumens	Beam Angle	Base	Dimmable	Box Qty
21204 - 3000K 21205 - 4000K 21206 - 6500K	6	445	110°	MR16	No	10
21207 - 3000K 21208 - 4000K 21209 - 6500K	6	445	38°	MR16	No	10

LED Spotlights-GU10

- 20,000 Hours Lifespan

- Plastic

- AC:220-240, 50Hz

- IP20

- 5 Year Warranty



SKU CCT	Watts	Lumens	Beam Angle	Base	Dimmable	Box Qty
21201 - 3000K 21202 - 4000K 21203 - 6500K	4.5	400	100°	GU10-Milky Cover	No	20
21108 - 3000K 21797 - 4000K 21511 - 6500K	4.5	345	38°	GU10	No	12
21195 - 3000K 21196 - 4000K 21197 - 6500K	6	445	38°	GU10	Yes	10
21189 - 3000K 21190 - 4000K 21191 - 6400K	6	445	38°	GU10	No	20
21198 - 3000K 21199 - 4000K 21200 - 6500K	6	445	110°	GU10	Yes	20
21192 - 3000K 21193 - 4000K 21194 - 6500K	6	445	110°	GU10	No	10

GU10 Holder 5PC Pack



SKU	Base	Box Qty
3423	GU10	100

GU10 Connector With Fastfix




SKU	Base
23185	GU10



Aluminium Profiles for Strip Lights

V-TAC's range of aluminum profiles were developed with the sole purpose of adding a stylish way of lighting. Coupled with our diverse range of accessories and controllers, these stylish lights can be installed in a variety of ways and applications.



Mounting Kit -Surfaced Type




SKU CCT	Unit Colour	Box Qty
3352	Silver	50
2876	Black	50
3367	White	50

Mounting Kit -Surfaced Type




SKU CCT	Unit Colour	Box Qty
3354	Silver	100
2878	Black	100
3366	White	100

Mounting Kit -Surfaced Type

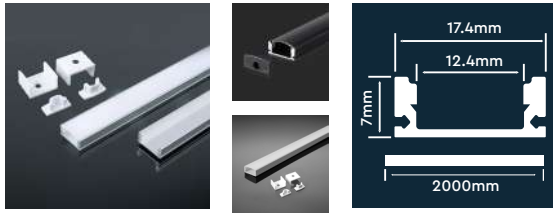


SKU CCT	Unit Colour	Box Qty
3355	Silver	100
2873	Black	100
3365	White	100

Mounting Kit -Surfaced Type

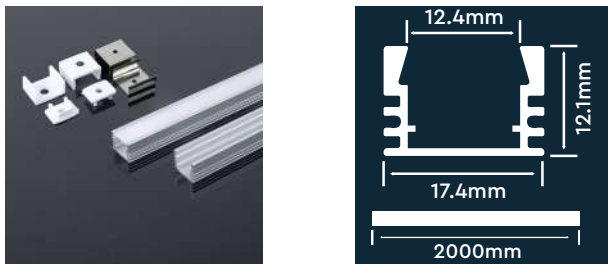


SKU CCT	Unit Colour	Box Qty
3358	Silver	50

Mounting Kit -Surfaced Type

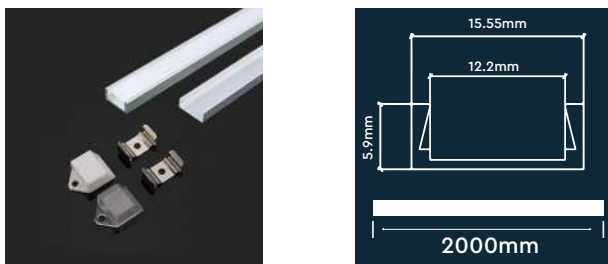


SKU CCT	Unit Colour	Box Qty
3370	Silver	100

Mounting Kit -Surfaced Type

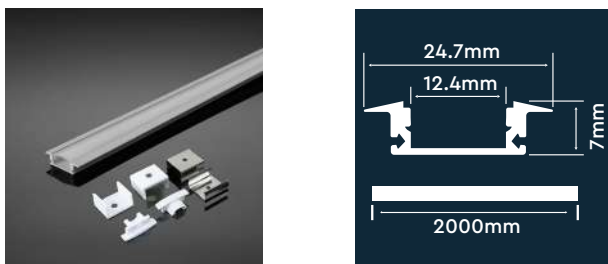

SKU CCT	Unit Colour	Box Qty
3368	White	100

Mounting Kit -Corner Type

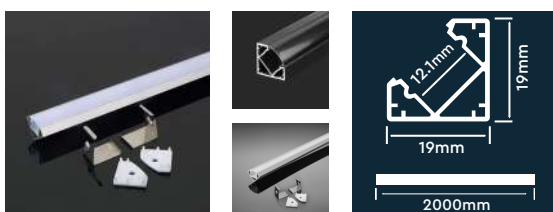

SKU CCT	Unit Colour	Box Qty
3356	Silver	50
2877	Black	50
3364	White	100

Mounting Kit -Corner Type



SKU CCT	Unit Colour	Box Qty
3353	Silver	100


2874	Black	100
-------------	-------	-----

Mounting Kit -Corner Type



SKU CCT	Unit Colour	Box Qty
3363	Silver	30

Mounting Kit -Corner Type

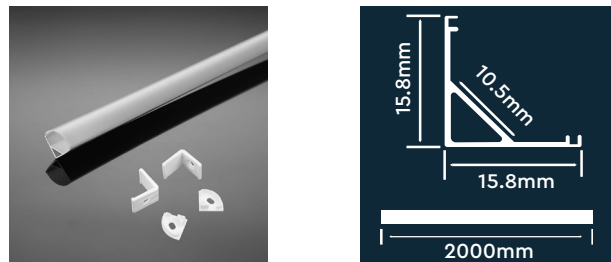

SKU CCT	Unit Colour	Box Qty
3369	White	100


Mounting Kit -Recessed Type



SKU CCT	Unit Colour	Box Qty
3350	Silver	100


2875	Black	100
-------------	-------	-----

Mounting Kit -Recessed Type

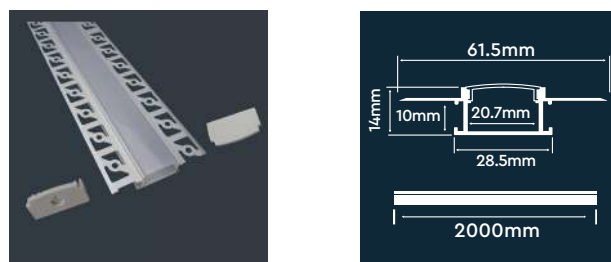


SKU CCT	Unit Colour	Box Qty
3359	Silver	50

Mounting Kit -Recessed Type




SKU CCT	Unit Colour	Box Qty
3360	Silver	50

Mounting Kit -Recessed Type




SKU CCT	Unit Colour	Box Qty
3361	Silver	50

Mounting Kit -Recessed Type





SKU CCT	Unit Colour	Box Qty
3362	Silver	50

Mounting Kit -Recessed Type



SKU CCT	Unit Colour	Box Qty
3357	Silver	50

Mounting Kit -Recessed Type



SKU CCT	Unit Colour	Box Qty
3351	Silver	80



LED Strip Lights

Add an extensive array of lights and colours to any setting or interior, rejuvenate and transform the ambience of any environment at the flick of a switch with V-TAC's LED Strip Light Series. Easy installation with minimal space requirement makes this the right choice for restaurants, kitchen, meeting rooms etc.




COB Striplights

**5M
ROLL**



SKU CCT	Watts(W/m)	Lumens (Lm/m)	Voltage	LED/m	Width(mm)	IP Rating	Box Qty
212652 - 3000K 212653 - 4000K 212654 - 6500K	10	800	DC: 24V	280	8mm	IP20	400
212667 - 3000K 2668 - 4000K 2669 - 6400K	10	1000	DC: 24V	420	10mm	IP20	50

COB Striplights-RGB

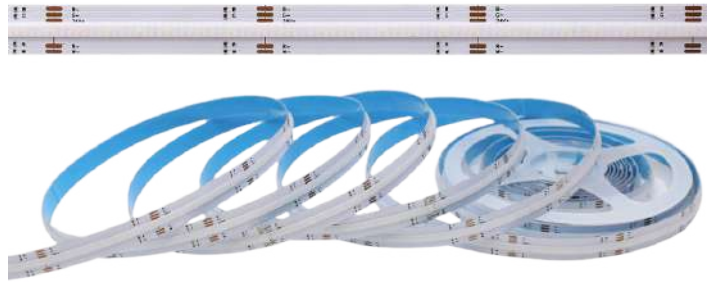

SKU CCT	Watts(W/m)	Voltage	LED/m	Width(mm)	IP Rating	Box Qty
2880 - RGB	13W	DC:24V	420	10mm	IP20	50

VT-2420 288W LED RGB CONTROLLER WITH 20 KEY RF REMOTE CONTROL



SKU	Box Qty
3339	60

CONNECTOR FOR LED COB STRIP 8MM-DUAL HEAD



SKU	Box Qty
2664	50

CONNECTOR FOR LED COB STRIP 10MM-SINGLE HEAD



SKU	Box Qty
2665	50

CONNECTOR FOR LED COB STRIP 10MM-DUAL HEAD



SKU	Box Qty
2666	50

Waterproof Power Supply-24V 4.2A



SKU	3101
Watts	100
Input Power	AC: 100-264V,50/60Hz
Output	DC:24V
IP Rating	IP65
Box Qty	20

Metal Power Supply-24V 6.5A



SKU	3253
Watts	150
Input Power	AC:85-265V,50/60Hz
Output	DC:24V
IP Rating	IP20
Box Qty	50

Metal Power Supply-24V 6.5A



SKU	3258
Watts	150
Input Power	AC:200-240V,50/60 Hz
Output	DC:24V
IP Rating	IP20
Box Qty	50

LED Smart Striplight Kit

RGB+COLOR CHANGE
DIMMABLE
CONTROL BRIGHTNESS LEVEL
FROM 0% TO 100%



SKU CCT	Watts(W/m)	Lumens (Lm/m)	Voltage	LED/m	Width(mm)	IP Rating	Box Qty
2699-RGB+3IN1	13W	1200	DC:12V	90	10mm	IP65	20

LED Striplight Kits BS Plug



SKU CCT	Watts(W/m)	Lumens (Lm/m)	Voltage	LED/m	Width	IP Rating	Box Qty
2606 - 3000K 212607 - 6400K 2605 - RGB	9	1000	DC:12V	60	10mm	IP65	20
2544 - RGB	10	1000	AC:100-265V, 50/60Hz	60	8mm	IP20	20
212546 - 6000K	11	900	AC:100-265V, 50/60Hz	60	8mm	IP20	20



Wireless Switches

Introducing the next generation of self-powered wireless switches, which operate via an RF receiver, making their use simple. Offering a push-touch button and remote features. Smart Switch is made of advanced PC material with high strength, high impact, and high-temperature resistance, non-toxic and eco-friendly, easy to clean, and colour-fadeless. No-screw design on panel surface; big button design with indicator; easy on/off operation with good sense of touch; low sound of pressing.



RECEIVER (OVER 500M) FOR WIRELESS SWITCHES



SKU

8458

1 GANG WAY SENSOR SWITCH



SKU

8460

Box Qty

50

2 GANG WAY SENSOR SWITCH



SKU

8461

Box Qty

50

3 GANG WAY SENSOR SWITCH



SKU

8462

Box Qty

50

3 GANG SENSOR REMOTE



SKU

8463

Box Qty

50

Electrical Wholesaler or Distributor?



Your centralised B2B
portal for everything
lighting — and more...

Register for your trade
account - to explore



Real-time Status



Bulk Pricing Deals



Track your order



New Arrivals



Back-In-Stock



Hi-res downloadable product images Complete access to
product sheets, certifications, manuals, and more!

my | **V-TAC**
ACCOUNT



Scan and fill out the form for
your free registration.

www.vtacexports.com

*T&C Apply

V-TAC (UK) LIMITED

V-TAC House, Kelpatrick Road,
Slough, Berkshire, SL1 6BW, UK.

Contact us

+44 207 299 1212

info@v-tac.co.uk



Listed in  Trimble
LUCKINS™



Follow us on



V-TAC

Meaningful Innovation.